



# BT ELEMENT SDN.BHD. (414224-W)

NO.77, JALAN PLUTO AZ U5/AZ, BANDAR PINGGIRAN SUBANG, 40150 SHAH ALAM , SELANGOR DARUL EHSAN, MALAYSIA  
TEL: +603-7845 6777 FAX: +603-7847 6677 E-mail: bteleme@gmail.com  
[www.btelement.com](http://www.btelement.com)

## MENUMASTER<sup>®</sup> Commercial Item #: \_\_\_\_\_



Model RCS511TS shown

**Medium Volume**  
This category of microwave is ideal for...

Applications:

- Pizza restaurants
- Casual dining
- Clubs
- Deli

Defrost:

- Defrosts most frozen food products

All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.

### Medium Volume

#### Menumaster Commercial Microwave Model RCS511TS

##### Power Output

- 1100 watts of power
- Five power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.


##### Easy to Use


- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option for easy one-touch cooking.

- Multiple quantity pad calculates the proper cooking times for multiple portions.
  - User friendly touch controls are easy to use.
  - Time entry option for added flexibility.
  - Digital display with countdown timer for simple operation and "at-a-glance" monitoring.
  - Braille touch pads.
  - See-through door and lighted interior for monitoring without opening the door.
  - 34 Liter (1.2 cubic ft.) capacity accommodates a 356 mm (14") platter, prepackaged foods and single servings.
  - Stackable to save valuable counter space.
- Easy to Maintain**
- Stainless steel exterior and interior for easy cleaning and a professional look.
  - Non-removable air filter protects oven components.
  - Constructed to withstand the foodservice environment.
  - Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.



## MenuMaster Commercial Microwave Model RCS511TS | Medium Volume

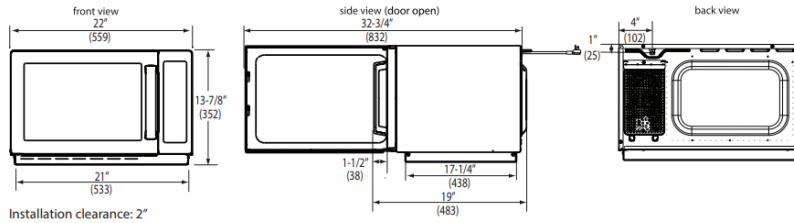

Specifications	
Model	RCS511TS UPC Code 728028020762
Configuration	Countertop
Control System	Touch
Programmable Control	10 pads
Settings Programmable	100
Max. Cooking Time	60:00
Power Levels	5
Defrost	Yes
Time Entry Option	Yes
Microwave Distribution	Rotating antenna, top
Magnetron(s)	1
Display	VFD
Stackable	Yes
Stage Cooking	Yes, 4
Interior Light	Yes
Door Handle	Grab & Go
Signal	End of cycle, adjustable
Air Filter	Non-removable with cleaning reminder
Multiple Portion Setting	Yes, X2
Exterior Dimensions	H 352 (13 3/8") W 559 (22") D*483 (19")
Cavity Dimensions	H 216 (8 1/2") W 368 (14 1/2") D 381 (15")
Door Depth	832 (32 3/4"), 90°+ door open
Usable Cavity Space	34 Liters (1.2 cubic ft.)
Multiple Portion Setting	Yes, X2
Exterior Dimensions	H 352 (13 3/8") W 559 (22") D*483 (19")
Cavity Dimensions	H 216 (8 1/2") W 368 (14 1/2") D 381 (15")
Door Depth	832 (32 3/4"), 90°+ door open
Usable Cavity Space	34 Liters (1.2 cubic ft.)
Exterior Finish	Stainless steel
Interior Finish	Stainless steel
Power Consumption	1600 W
Power Output**	1100 W** Microwave
Power Source	230V 50 Hz, 16 A single phase
Plug Configuration / Cord	CEE 7/7 "Shuko" 1.5 m (5 ft.) 
Frequency	2450 MHz
Product Weight	19 kg. (41 lb.)
Ship weight (approx.)	21 kg (47 lb.)
Shipping Carton Size	H 422 (16 1/4") W 640 (25 1/8") D 502 (19 3/4")
LPS Shippable	Yes

Specification #:

AIA File #:

Measurements are in millimeters  
\* Includes handle  
\*\* IEC 60705 Tested

### Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items with two multiple portions. Touch pad shall include Braille for ADA compliance. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. There shall be 5 power levels, including defrost and 4 cooking stages. Microwave output shall be 1100 watts distributed by one magnetron with a rotating top antenna to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and go handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 34 Liter (1.2 cubic ft.) cavity shall accommodate a 356 mm (14") platter. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Front air filter shall be permanently affixed to the front off the oven and have a clean filter reminder. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services.

